Specifications

PRETREATmaker LINE 7-4

All stations	7
Stations in dryer	4
Work station operator	1
Heat press station	1
PRETREAT station	1
LCD Touch-Display	10"
Start up time	25 minutes
ECO mode	yes
Connection	3 x 400 VAC
Power	15 kW
Compressed air	6 bar - 15 L machine cycle
Weight / Weight (transport)	approx. 500 kg / approx. 650 kg
Dimensions	W 3,76 x D 2,00 x H 1,80 m
Dimensions (transport)	Box 1: W 1,20 x D 0,8 x H 1,4 m
	Box 2: W 2,86 x D 1,20 x H 1,80 m
	Box 3: W 1,20 x D 0,8 x H 1,4 m

PRETREATmaker LINE 11-6

All stations	11
Stations in dryer	6
Work stations operator	2
Heat press stations	2
PRETREAT station	1
LCD Touch-Display	10"
Start up time	25 minutes
ECO mode	yes
Connection	3 x 400 VAC
Power	24,5 kW
Compressed air	6 bar - 20 L machine cycle
Weight / Weight (transport)	approx. 700 kg / approx. 875 kg
Dimensions	W 5,16 x D 2,00 x H 1,80 m
Dimensions (transport)	Box 1: W 1,20 x D 0,8 x H 1,4 m
	Box 2: W 4,40 x D 1,20 x H 1,80 m
	Box 3: W 1,20 x D 0,8 x H 1,4 m
	Box 4: W 1,20 x D 0,8 x H 1,4 m

PRETREAT-Station

Spraying area	40 x 50 cm
Spraying method	Nozzles are moving over the table (inside)
Nozzles	5 pieces
Nozzle material	stainless steel
Operating pressure	approx. 6 bar
Volume	1 x 60 L pretreat, 1 x 10 L pretreat, 1 x 10 L water
Deposit tanks	2 x 10 L

Pneumatic heat press station

Platen size	40 x 50 cm	
Pressure	max. 6 bar	
Temperature	max. 220 °C	
Temperature accuracy	+ 0.5 %	

Drying tunnel

IR temperature max.	350 °C
Air circulation temperature	max. 200 °C



WALTER SCHULZE GMBH

Haberstraße 15 - 19 | 12057 Berlin | Germany Tel. +49 30. 68 29 54-0 | Fax +49 30. 68 29 54-54

PRETREATMAKER.com

SCHULZESHOP.com






PRETREATmaker LINE

PRE-PRESS) | PRETREAT | DRY | AFTER-PRESS

|| UP TO 300 SHIRTS/HOUR || READY TO PRINT





WORLD



The world's FIRST self-contained industrial pretreatment device for the full process of preparing garments including pretreatment, drying and pre-pressing of textiles for DTG printing.

ALLIN ONE. PRE-PRESS | PRETREAT | DRY | AFTER-PRESS

PRETREATMAKER LINE 7-4

Drying tunnel Control Panel Drying tunnel PRETREAT-Station Operator


All stations	7
Stations in dryer	4
Work station operator	1
Heat press station	1
PRETREAT station	1







PRETREATMAKER LINE 11-6

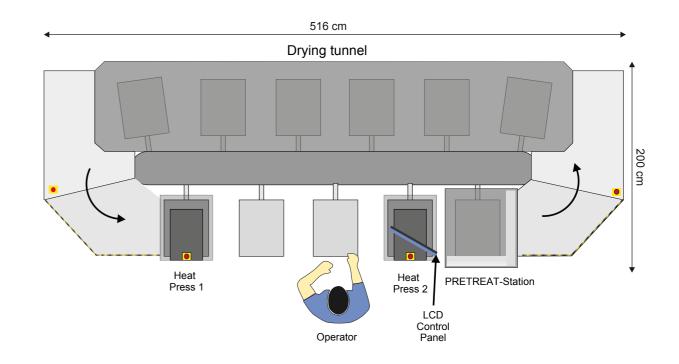

All stations	11
Stations in dryer	6
Work stations operator	2
Heat press stations	2
PRETREAT station	1





